
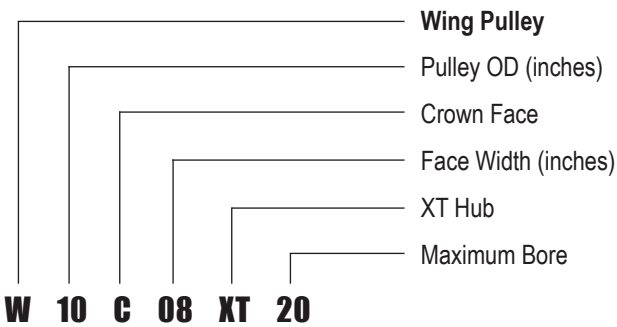


Determining Pulley Face Width

To select the proper pulley face width, the belt width size is necessary. Two rules apply:

- Up to and including 42 inch belt width, 2 inches should be added to the face dimension. For example, the pulley width for a 24 inch wide belt should be 26 inches.
- Above 42 inches, 3 inches should be added. For example, the pulley width for a 48 inch wide belt should be 51 inches.


Pulley Identification

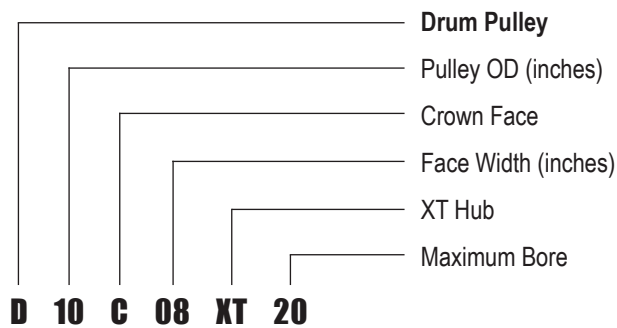

Procedure for Ordering Pulleys

Dimensions must be given as follows:

- Diameter of pulley
- Face width of pulley
- Shaft size
- Keyway size

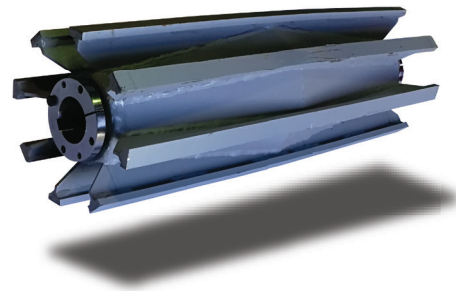

Drum Conveyor Pulleys of 12" diameter and larger are formed in custom-designed crowning rolls by a cold forming process that increases the strength of the steel. Rims are formed in one-piece construction. This perfected construction technique also permits the use of internal discs, greatly reducing radical deformation and longitudinal deflection in the rim. Available in standard and heavy duty construction in sizes 12" through 60" O.D., 12" through 63" face width.

Assinck's Drum Pulleys are rolled in specially designed plate rolls with crown built into the rolls. With our design, you receive a uniformly crowned conveyor pulley, each time you order.

- Full depth submerged arc welds with hubs welded to end disc on both sides.
- Popular styles of tapered compressing hubs available.
- Engineered pulleys available for special applications.



Assinck's Lagged Drum Conveyor Pulleys contain black rubber lagging without fabric backing, bonded directly to the pulley rim by the vulcanizing process. This lagging serves primarily to increase the tractive capacity of drive pulleys and to provide improved resistance to abrasive conditions on both drive and non-drive pulleys. Furnished with smooth surface, or with grooving in herringbone or other patterns, and available in various fabrics or material.

Welded Steel Drum Conveyor Pulleys – Crown Face Available Sizes

Note: Heavy Duty Crown Faced Pulleys are available in 3/8" Shells – 1/2", 3/4" and 1" End Disc in 26", 32", 44", 51" and 63" Face Width

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
10" diameter				
D10C08XT20	XTB20	2.0"	8"	41
D10C10	XTB20	2.0"	10"	45
D10C12	XTB20	2.0"	12"	49
D10C14	XTB20	2.0"	14"	54
D10C16	XTB20	2.0"	16"	58
D10C18	XTB20	2.0"	18"	63
D10C20	XTB20	2.0"	20"	67
D10C26	XTB20	2.0"	26"	80
D10C32	XTB20	2.0"	32"	94
D10C38	XTB20	2.0"	38"	107
D10C08XT25	XTB25	2.5"	8"	45
D10C10	XTB25	2.5"	10"	49
D10C12	XTB25	2.5"	12"	54
D10C14	XTB25	2.5"	14"	58
D10C16	XTB25	2.5"	16"	63
D10C18	XTB25	2.5"	18"	67
D10C20	XTB25	2.5"	20"	71
D10C26	XTB25	2.5"	26"	85
D10C32	XTB25	2.5"	32"	98
D10C38	XTB25	2.5"	38"	111
D10C08XT30	XTB30	3.0"	8"	51
D10C10	XTB30	3.0"	10"	55
D10C12	XTB30	3.0"	12"	60
D10C14	XTB30	3.0"	14"	64
D10C16	XTB30	3.0"	16"	69

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
10" diameter				
D10C08	XTB30	3.0"	18"	73
D10C20	XTB30	3.0"	20"	78
D10C26	XTB30	3.0"	26"	91
D10C32	XTB30	3.0"	32"	104
D10C38	XTB30	3.0"	38"	118
12" diameter				
D12C08XT25	XTB25	2.5"	8"	56
D12C10	XTB25	2.5"	10"	61
D12C12	XTB25	2.5"	12"	66
D12C14	XTB25	2.5"	14"	72
D12C16	XTB25	2.5"	16"	77
D12C18	XTB25	2.5"	18"	82
D12C20	XTB25	2.5"	20"	88
D12C26	XTB25	2.5"	26"	104
D12C32	XTB25	2.5"	32"	120
D12C38	XTB25	2.5"	38"	136
D12C44	XTB25	2.5"	44"	169
D12C08XT30	XTB30	3.0"	8"	62
D12C10	XTB30	3.0"	10"	67
D12C12	XTB30	3.0"	12"	71
D12C14	XTB30	3.0"	14"	78
D12C16	XTB30	3.0"	16"	83

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
12" diameter				
D12C18	XTB30	3.0"	18"	89
D12C20	XTB30	3.0"	20"	94
D12C26	XTB30	3.0"	26"	110
D12C32	XTB30	3.0"	32"	126
D12C38	XTB30	3.0"	38"	142
D12C44	XTB30	3.0"	44"	175
D12C51	XTB30	3.0"	51"	189
D12C57	XTB30	3.0"	57"	205
D12C63	XTB30	3.0"	63"	221
D12C08XT35	XTB35	3.5"	8"	73
D12C10	XTB35	3.5"	10"	79
D12C12	XTB35	3.5"	12"	84
D12C14	XTB35	3.5"	14"	89
D12C16	XTB35	3.5"	16"	95
D12C18	XTB35	3.5"	18"	100
D12C20	XTB35	3.5"	20"	105
D12C26	XTB35	3.5"	26"	121
D12C32	XTB35	3.5"	32"	137
D12C38	XTB35	3.5"	38"	153
D12C44	XTB35	3.5"	44"	187
D12C51	XTB35	3.5"	51"	200
D12C57	XTB35	3.5"	57"	216
D12C63	XTB35	3.5"	63"	232
14" diameter				
D14C08XT25	XTB25	2.5"	8"	68
D14C10	XTB25	2.5"	10"	74
D14C12	XTB25	2.5"	12"	80
D14C14	XTB25	2.5"	14"	87
D14C16	XTB25	2.5"	16"	93
D14C18	XTB25	2.5"	18"	99
D14C20	XTB25	2.5"	20"	105
D14C26	XTB25	2.5"	26"	124
D14C32	XTB25	2.5"	32"	143
D14C38	XTB25	2.5"	38"	161
D14C08XT30	XTB30	3.0"	8"	74
D14C10	XTB30	3.0"	10"	80
D14C12	XTB30	3.0"	12"	87
D14C14	XTB30	3.0"	14"	93
D14C16	XTB30	3.0"	16"	99
D14C18	XTB30	3.0"	18"	105
D14C20	XTB30	3.0"	20"	111
D14C26	XTB30	3.0"	26"	130
D14C32	XTB30	3.0"	32"	149
D14C38	XTB30	3.0"	38"	168
D14C44	XTB30	3.0"	44"	209
D14C51	XTB30	3.0"	51"	224
D14C57	XTB30	3.0"	57"	243
D14C63	XTB30	3.0"	63"	261

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
14" diameter				
D14C08XT35	XTB35	3.5"	8"	85
D14C10	XTB35	3.5"	10"	92
D14C12	XTB35	3.5"	12"	98
D14C14	XTB35	3.5"	14"	104
D14C16	XTB35	3.5"	16"	110
D14C18	XTB35	3.5"	18"	116
D14C20	XTB35	3.5"	20"	123
D14C26	XTB35	3.5"	26"	141
D14C32	XTB35	3.5"	32"	160
D14C38	XTB35	3.5"	38"	179
D14C44	XTB35	3.5"	44"	220
D14C51	XTB35	3.5"	51"	236
D14C57	XTB35	3.5"	57"	254
D14C63	XTB35	3.5"	63"	273
D14C08XT40	XTB40	4.0"	8"	100
D14C10	XTB40	4.0"	10"	106
D14C12	XTB40	4.0"	12"	112
D14C14	XTB40	4.0"	14"	118
D14C16	XTB40	4.0"	16"	125
D14C18	XTB40	4.0"	18"	131
D14C20	XTB40	4.0"	20"	137
D14C26	XTB40	4.0"	26"	156
D14C32	XTB40	4.0"	32"	175
D14C38	XTB40	4.0"	38"	193
D14C44	XTB40	4.0"	44"	234
D14C51	XTB40	4.0"	51"	250
D14C57	XTB40	4.0"	57"	269
D14C63	XTB40	4.0"	63"	287
16" diameter				
D16C08XT25	XTB25	2.5"	8"	82
D16C10	XTB25	2.5"	10"	89
D16C12	XTB25	2.5"	12"	96
D16C14	XTB25	2.5"	14"	103
D16C16	XTB25	2.5"	16"	110
D16C18	XTB25	2.5"	18"	117
D16C20	XTB25	2.5"	20"	124
D16C26	XTB25	2.5"	26"	149
D16C32	XTB25	2.5"	32"	167
D16C38	XTB25	2.5"	38"	188
D16C44	XTB25	2.5"	44"	238
D16C51	XTB25	2.5"	51"	256
D16C57	XTB25	2.5"	57"	277
D16C63	XTB25	2.5"	63"	299

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
16" diameter				
D16C08XT30	XTB30	3.0"	8"	88
D16C10	XTB30	3.0"	10"	95
D16C12	XTB30	3.0"	12"	102
D16C14	XTB30	3.0"	14"	109
D16C16	XTB30	3.0"	16"	116
D16C18	XTB30	3.0"	18"	123
D16C20	XTB30	3.0"	20"	130
D16C26	XTB30	3.0"	26"	155
D16C32	XTB30	3.0"	32"	173
D16C38	XTB30	3.0"	38"	194
D16C44	XTB30	3.0"	44"	244
D16C51	XTB30	3.0"	51"	262
D16C57	XTB30	3.0"	57"	283
D16C63	XTB30	3.0"	63"	305
D16C08XT35	XTB35	3.5"	8"	99
D16C10	XTB35	3.5"	10"	106
D16C12	XTB35	3.5"	12"	113
D16C14	XTB35	3.5"	14"	120
D16C16	XTB35	3.5"	16"	127
D16C18	XTB35	3.5"	18"	135
D16C20	XTB35	3.5"	20"	142
D16C26	XTB35	3.5"	26"	166
D16C32	XTB35	3.5"	32"	185
D16C38	XTB35	3.5"	38"	206
D16C44	XTB35	3.5"	44"	256
D16C51	XTB35	3.5"	51"	273
D16C57	XTB35	3.5"	57"	295
D16C63	XTB35	3.5"	63"	316
D16C08XT40	XTB40	4.0"	8"	113
D16C10	XTB40	4.0"	10"	121
D16C12	XTB40	4.0"	12"	128
D16C14	XTB40	4.0"	14"	135
D16C16	XTB40	4.0"	16"	142
D16C18	XTB40	4.0"	18"	149
D16C20	XTB40	4.0"	20"	156
D16C26	XTB40	4.0"	26"	181
D16C32	XTB40	4.0"	32"	199
D16C38	XTB40	4.0"	38"	220
D16C44	XTB40	4.0"	44"	270
D16C51	XTB40	4.0"	51"	288
D16C57	XTB40	4.0"	57"	309
D16C63	XTB40	4.0"	63"	331
18" diameter				
D18C08XT25	XTB25	2.5"	8"	96
D18C10	XTB25	2.5"	10"	104
D18C12	XTB25	2.5"	12"	112
D18C14	XTB25	2.5"	14"	120
D18C16	XTB25	2.5"	16"	128

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
18" diameter				
D18C18	XTB25	2.5"	18"	134
D18C20	XTB25	2.5"	20"	144
D18C26	XTB25	2.5"	26"	168
D18C32	XTB25	2.5"	32"	192
D18C38	XTB25	2.5"	38"	216
D18C44	XTB25	2.5"	44"	275
D18C08XT30	XTB30	3.0"	8"	102
D18C10	XTB30	3.0"	10"	111
D18C12	XTB30	3.0"	12"	119
D18C14	XTB30	3.0"	14"	127
D18C16	XTB30	3.0"	16"	135
D18C18	XTB30	3.0"	18"	141
D18C20	XTB30	3.0"	20"	151
D18C26	XTB30	3.0"	26"	175
D18C32	XTB30	3.0"	32"	199
D18C38	XTB30	3.0"	38"	223
D18C44	XTB30	3.0"	44"	282
D18C51	XTB30	3.0"	51"	302
D18C57	XTB30	3.0"	57"	326
D18C63	XTB30	3.0"	63"	350
D18C08XT35	XTB35	3.5"	8"	114
D18C10	XTB35	3.5"	10"	122
D18C12	XTB35	3.5"	12"	130
D18C14	XTB35	3.5"	14"	138
D18C16	XTB35	3.5"	16"	146
D18C18	XTB35	3.5"	18"	152
D18C20	XTB35	3.5"	20"	162
D18C26	XTB35	3.5"	26"	186
D18C32	XTB35	3.5"	32"	210
D18C38	XTB35	3.5"	38"	234
D18C44	XTB35	3.5"	44"	293
D18C51	XTB35	3.5"	51"	313
D18C57	XTB35	3.5"	57"	337
D18C63	XTB35	3.5"	63"	361
D18C08XT40	XTB40	4.0"	8"	128
D18C10	XTB40	4.0"	10"	136
D18C12	XTB40	4.0"	12"	141
D18C14	XTB40	4.0"	14"	152
D18C16	XTB40	4.0"	16"	160
D18C18	XTB40	4.0"	18"	166
D18C20	XTB40	4.0"	20"	176
D18C26	XTB40	4.0"	26"	200
D18C32	XTB40	4.0"	32"	224
D18C38	XTB40	4.0"	38"	248
D18C44	XTB40	4.0"	44"	307
D18C51	XTB40	4.0"	51"	327
D18C57	XTB40	4.0"	57"	351
D18C63	XTB40	4.0"	63"	376

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
18" diameter				
D18C08XT45	XTB45	4.5"	8"	146
D18C10	XTB45	4.5"	10"	154
D18C12	XTB45	4.5"	12"	162
D18C14	XTB45	4.5"	14"	170
D18C16	XTB45	4.5"	16"	178
D18C18	XTB45	4.5"	18"	184
D18C20	XTB45	4.5"	20"	194
D18C26	XTB45	4.5"	26"	218
D18C32	XTB45	4.5"	32"	242
D18C38	XTB45	4.5"	38"	266
D18C44	XTB45	4.5"	44"	325
D18C51	XTB45	4.5"	51"	345
D18C57	XTB45	4.5"	57"	369
D18C63	XTB45	4.5"	63"	394
20" diameter				
D20C08XT25	XTB25	2.5"	8"	113
D20C10	XTB25	2.5"	10"	122
D20C12	XTB25	2.5"	12"	131
D20C14	XTB25	2.5"	14"	139
D20C16	XTB25	2.5"	16"	148
D20C18	XTB25	2.5"	18"	157
D20C20	XTB25	2.5"	20"	166
D20C26	XTB25	2.5"	26"	193
D20C32	XTB25	2.5"	32"	220
D20C38	XTB25	2.5"	38"	246
D20C44	XTB25	2.5"	44"	315
D20C08XT30	XTB30	3.0"	8"	119
D20C10	XTB30	3.0"	10"	128
D20C12	XTB30	3.0"	12"	137
D20C14	XTB30	3.0"	14"	146
D20C16	XTB30	3.0"	16"	155
D20C18	XTB30	3.0"	18"	163
D20C20	XTB30	3.0"	20"	172
D20C26	XTB30	3.0"	26"	199
D20C32	XTB30	3.0"	32"	226
D20C38	XTB30	3.0"	38"	252
D20C44	XTB30	3.0"	44"	321
D20C51	XTB30	3.0"	51"	344
D20C57	XTB30	3.0"	57"	370
D20C63	XTB30	3.0"	63"	397
D20C08XT35	XTB35	3.5"	8"	130
D20C10	XTB35	3.5"	10"	139
D20C12	XTB35	3.5"	12"	148
D20C14	XTB35	3.5"	14"	157
D20C16	XTB35	3.5"	16"	166

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
20" diameter				
D20C18	XTB35	3.5"	18"	175
D20C20	XTB35	3.5"	20"	184
D20C26	XTB35	3.5"	26"	210
D20C32	XTB35	3.5"	32"	237
D20C38	XTB35	3.5"	38"	264
D20C44	XTB35	3.5"	44"	333
D20C51	XTB35	3.5"	51"	355
D20C57	XTB35	3.5"	57"	382
D20C63	XTB35	3.5"	63"	408
D20C08XT40	XTB40	4.0"	8"	145
D20C10	XTB40	4.0"	10"	154
D20C12	XTB40	4.0"	12"	163
D20C14	XTB40	4.0"	14"	171
D20C16	XTB40	4.0"	16"	180
D20C18	XTB40	4.0"	18"	189
D20C20	XTB40	4.0"	20"	198
D20C26	XTB40	4.0"	26"	225
D20C32	XTB40	4.0"	32"	252
D20C38	XTB40	4.0"	38"	278
D20C44	XTB40	4.0"	44"	347
D20C51	XTB40	4.0"	51"	369
D20C57	XTB40	4.0"	57"	396
D20C63	XTB40	4.0"	63"	423
D20C08XT45	XTB45	4.5"	8"	163
D20C10	XTB45	4.5"	10"	172
D20C12	XTB45	4.5"	12"	181
D20C14	XTB45	4.5"	14"	189
D20C16	XTB45	4.5"	16"	198
D20C18	XTB45	4.5"	18"	207
D20C20	XTB45	4.5"	20"	216
D20C26	XTB45	4.5"	26"	243
D20C32	XTB45	4.5"	32"	270
D20C38	XTB45	4.5"	38"	296
D20C44	XTB45	4.5"	44"	365
D20C51	XTB45	4.5"	51"	387
D20C57	XTB45	4.5"	57"	414
D20C63	XTB45	4.5"	63"	441

Portable Crushing Plants

- Including Primary, Secondary and Tertiary configurations
- Jaws
- Cones
- Vertical and horizontal impact breakers
- Recycling plants

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
24" diameter				
D24C08XT25	XTB25	2.5"	8"	149
D24C10	XTB25	2.5"	10"	160
D24C12	XTB25	2.5"	12"	171
D24C14	XTB25	2.5"	14"	181
D24C16	XTB25	2.5"	16"	192
D24C18	XTB25	2.5"	18"	203
D24C20	XTB25	2.5"	20"	213
D24C26	XTB25	2.5"	26"	245
D24C32	XTB25	2.5"	32"	277
D24C38	XTB25	2.5"	38"	309
D24C44	XTB25	2.5"	44"	400
D24C08XT30	XTB30	3.0"	8"	155
D24C10	XTB30	3.0"	10"	166
D24C12	XTB30	3.0"	12"	177
D24C14	XTB30	3.0"	14"	187
D24C16	XTB30	3.0"	16"	198
D24C18	XTB30	3.0"	18"	209
D24C20	XTB30	3.0"	20"	220
D24C26	XTB30	3.0"	26"	252
D24C32	XTB30	3.0"	32"	284
D24C38	XTB30	3.0"	38"	316
D24C44	XTB30	3.0"	44"	406
D24C51	XTB30	3.0"	51"	433
D24C57	XTB30	3.0"	57"	465
D24C63	XTB30	3.0"	63"	497
D24C08XT35	XTB35	3.5"	8"	167
D24C10	XTB35	3.5"	10"	177
D24C12	XTB35	3.5"	12"	188
D24C14	XTB35	3.5"	14"	198
D24C16	XTB35	3.5"	16"	210
D24C18	XTB35	3.5"	18"	220
D24C20	XTB35	3.5"	20"	231
D24C26	XTB35	3.5"	26"	263
D24C32	XTB35	3.5"	32"	295
D24C38	XTB35	3.5"	38"	327
D24C44	XTB35	3.5"	44"	418
D24C51	XTB35	3.5"	51"	445
D24C57	XTB35	3.5"	57"	477
D24C63	XTB35	3.5"	63"	509
D24C08XT40	XTB40	4.0"	8"	181
D24C10	XTB40	4.0"	10"	192
D24C12	XTB40	4.0"	12"	203
D24C14	XTB40	4.0"	14"	213
D24C16	XTB40	4.0"	16"	224
D24C18	XTB40	4.0"	18"	235
D24C20	XTB40	4.0"	20"	245
D24C26	XTB40	4.0"	26"	277
D24C32	XTB40	4.0"	32"	309
D24C38	XTB40	4.0"	38"	341

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
24" diameter				
D24C44	XTB40	4.0"	44"	432
D24C51	XTB40	4.0"	51"	459
D24C57	XTB40	4.0"	57"	491
D24C63	XTB40	4.0"	63"	523
D24C08XT45	XTB45	4.5"	8"	199
D24C10	XTB45	4.5"	10"	210
D24C12	XTB45	4.5"	12"	221
D24C14	XTB45	4.5"	14"	231
D24C16	XTB45	4.5"	16"	242
D24C18	XTB45	4.5"	18"	253
D24C20	XTB45	4.5"	20"	263
D24C26	XTB45	4.5"	26"	295
D24C32	XTB45	4.5"	32"	327
D24C38	XTB45	4.5"	38"	359
D24C44	XTB45	4.5"	44"	450
D24C51	XTB45	4.5"	51"	477
D24C57	XTB45	4.5"	57"	509
D24C63	XTB45	4.5"	63"	541
D24C08XT50	XTB50	5.0"	8"	244
D24C10	XTB50	5.0"	10"	255
D24C12	XTB50	5.0"	12"	266
D24C14	XTB50	5.0"	14"	276
D24C16	XTB50	5.0"	16"	287
D24C18	XTB50	5.0"	18"	298
D24C20	XTB50	5.0"	20"	308
D24C26	XTB50	5.0"	26"	340
D24C32	XTB50	5.0"	32"	372
D24C38	XTB50	5.0"	38"	404
D24C44	XTB50	5.0"	44"	495
D24C51	XTB50	5.0"	51"	522
D24C57	XTB50	5.0"	57"	554
D24C63	XTB50	5.0"	63"	586
30" diameter				
D30C08XT30	XTB30	3.0"	8"	220
D30C10	XTB30	3.0"	10"	233
D30C12	XTB30	3.0"	12"	247
D30C14	XTB30	3.0"	14"	260
D30C16	XTB30	3.0"	16"	273
D30C18	XTB30	3.0"	18"	287
D30C20	XTB30	3.0"	20"	300
D30C26	XTB30	3.0"	26"	340
D30C32	XTB30	3.0"	32"	380
D30C38	XTB30	3.0"	38"	420
D30C44	XTB30	3.0"	44"	549
D30C51	XTB30	3.0"	51"	582
D30C57	XTB30	3.0"	57"	622
D30C63	XTB30	3.0"	63"	662

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
30" diameter				
D30C08XT35	XTB35	3.5"	8"	231
D30C10	XTB35	3.5"	10"	245
D30C12	XTB35	3.5"	12"	258
D30C14	XTB35	3.5"	14"	271
D30C16	XTB35	3.5"	16"	285
D30C18	XTB35	3.5"	18"	298
D30C20	XTB35	3.5"	20"	311
D30C26	XTB35	3.5"	26"	352
D30C32	XTB35	3.5"	32"	392
D30C38	XTB35	3.5"	38"	432
D30C44	XTB35	3.5"	44"	560
D30C51	XTB35	3.5"	51"	593
D30C57	XTB35	3.5"	57"	633
D30C63	XTB35	3.5"	63"	674
D30C08XT40	XTB40	4.0"	8"	246
D30C10	XTB40	4.0"	10"	251
D30C12	XTB40	4.0"	12"	272
D30C14	XTB40	4.0"	14"	286
D30C16	XTB40	4.0"	16"	299
D30C18	XTB40	4.0"	18"	313
D30C20	XTB40	4.0"	20"	326
D30C26	XTB40	4.0"	26"	366
D30C32	XTB40	4.0"	32"	406
D30C38	XTB40	4.0"	38"	446
D30C44	XTB40	4.0"	44"	574
D30C51	XTB40	4.0"	51"	608
D30C57	XTB40	4.0"	57"	648
D30C63	XTB40	4.0"	63"	688
D30C08XT45	XTB45	4.5"	8"	264
D30C10	XTB45	4.5"	10"	277
D30C12	XTB45	4.5"	12"	290
D30C14	XTB45	4.5"	14"	304
D30C16	XTB45	4.5"	16"	317
D30C18	XTB45	4.5"	18"	331
D30C20	XTB45	4.5"	20"	344
D30C26	XTB45	4.5"	26"	384
D30C32	XTB45	4.5"	32"	424
D30C38	XTB45	4.5"	38"	464
D30C44	XTB45	4.5"	44"	592
D30C51	XTB45	4.5"	51"	626
D30C57	XTB45	4.5"	57"	666
D30C63	XTB45	4.5"	63"	706
D30C08XT50	XTB50	5.0"	8"	309
D30C10	XTB50	5.0"	10"	322
D30C12	XTB50	5.0"	12"	336
D30C14	XTB50	5.0"	14"	349
D30C16	XTB50	5.0"	16"	362

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
30" diameter				
D30C18	XTB50	5.0"	18"	376
D30C20	XTB50	5.0"	20"	389
D30C26	XTB50	5.0"	26"	429
D30C32	XTB50	5.0"	32"	469
D30C38	XTB50	5.0"	38"	509
D30C44	XTB50	5.0"	44"	637
D30C51	XTB50	5.0"	51"	671
D30C57	XTB50	5.0"	57"	711
D30C63	XTB50	5.0"	63"	751
D30C08XT60	XTB60	6.0"	8"	362
D30C10	XTB60	6.0"	10"	375
D30C12	XTB60	6.0"	12"	388
D30C14	XTB60	6.0"	14"	402
D30C16	XTB60	6.0"	16"	415
D30C18	XTB60	6.0"	18"	429
D30C20	XTB60	6.0"	20"	442
D30C26	XTB60	6.0"	26"	482
D30C32	XTB60	6.0"	32"	522
D30C38	XTB60	6.0"	38"	562
D30C44	XTB60	6.0"	44"	690
D30C51	XTB60	6.0"	51"	724
D30C57	XTB60	6.0"	57"	764
D30C63	XTB60	6.0"	63"	804
36" diameter				
D36C08XT30	XTB30	3.0"	8"	297
D36C10	XTB30	3.0"	10"	313
D36C12	XTB30	3.0"	12"	329
D36C14	XTB30	3.0"	14"	345
D36C16	XTB30	3.0"	16"	361
D36C18	XTB30	3.0"	18"	377
D36C20	XTB30	3.0"	20"	393
D36C26	XTB30	3.0"	26"	441
D36C32	XTB30	3.0"	32"	489
D36C38	XTB30	3.0"	38"	537
D36C44	XTB30	3.0"	44"	709
D36C51	XTB30	3.0"	51"	749
D36C57	XTB30	3.0"	57"	797
D36C63	XTB30	3.0"	63"	845
D36C08XT35	XTB35	3.5"	8"	308
D36C10	XTB35	3.5"	10"	234
D36C12	XTB35	3.5"	12"	340
D36C14	XTB35	3.5"	14"	356
D36C16	XTB35	3.5"	16"	373
D36C18	XTB35	3.5"	18"	388
D36C20	XTB35	3.5"	20"	404
D36C26	XTB35	3.5"	26"	452
D36C32	XTB35	3.5"	32"	500
D36C38	XTB35	3.5"	38"	548

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
36" diameter				
D36C44	XTB35	3.5"	44"	721
D36C51	XTB35	3.5"	51"	761
D36C57	XTB35	3.5"	57"	809
D36C63	XTB35	3.5"	63"	857
D36C08XT40	XTB40	4.0"	8"	323
D36C10	XTB40	4.0"	10"	339
D36C12	XTB40	4.0"	12"	355
D36C14	XTB40	4.0"	14"	371
D36C16	XTB40	4.0"	16"	387
D36C18	XTB40	4.0"	18"	403
D36C20	XTB40	4.0"	20"	419
D36C26	XTB40	4.0"	26"	467
D36C32	XTB40	4.0"	32"	515
D36C38	XTB40	4.0"	38"	563
D36C44	XTB40	4.0"	44"	735
D36C51	XTB40	4.0"	51"	775
D36C57	XTB40	4.0"	57"	823
D36C63	XTB40	4.0"	63"	871
D36C08XT45	XTB45	4.5"	8"	341
D36C10	XTB45	4.5"	10"	357
D36C12	XTB45	4.5"	12"	373
D36C14	XTB45	4.5"	14"	389
D36C16	XTB45	4.5"	16"	405
D36C18	XTB45	4.5"	18"	421
D36C20	XTB45	4.5"	20"	437
D36C26	XTB45	4.5"	26"	485
D36C32	XTB45	4.5"	32"	533
D36C38	XTB45	4.5"	38"	581
D36C44	XTB45	4.5"	44"	753
D36C51	XTB45	4.5"	51"	793
D36C57	XTB45	4.5"	57"	841
D36C63	XTB45	4.5"	63"	889
D36C08XT50	XTB50	5.0"	8"	386
D36C10	XTB50	5.0"	10"	402
D36C12	XTB50	5.0"	12"	418
D36C14	XTB50	5.0"	14"	434
D36C16	XTB50	5.0"	16"	450
D36C18	XTB50	5.0"	18"	482
D36C20	XTB50	5.0"	20"	496
D36C26	XTB50	5.0"	26"	530
D36C32	XTB50	5.0"	32"	578
D36C38	XTB50	5.0"	38"	626
D36C44	XTB50	5.0"	44"	798
D36C51	XTB50	5.0"	51"	838
D36C57	XTB50	5.0"	57"	886
D36C63	XTB50	5.0"	63"	934

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
36" diameter				
D36C08XT60	XTB60	6.0"	8"	439
D36C10	XTB60	6.0"	10"	455
D36C12	XTB60	6.0"	12"	471
D36C14	XTB60	6.0"	14"	487
D36C16	XTB60	6.0"	16"	503
D36C18	XTB60	6.0"	18"	519
D36C20	XTB60	6.0"	20"	535
D36C26	XTB60	6.0"	26"	583
D36C32	XTB60	6.0"	32"	631
D36C38	XTB60	6.0"	38"	679
D36C44	XTB60	6.0"	44"	851
D36C51	XTB60	6.0"	51"	891
D36C57	XTB60	6.0"	57"	939
D36C63	XTB60	6.0"	63"	987
42" diameter				
D42C08XT30	XTB30	3.0"	8"	386
D42C10	XTB30	3.0"	10"	404
D42C12	XTB30	3.0"	12"	423
D42C14	XTB30	3.0"	14"	442
D42C16	XTB30	3.0"	16"	461
D42C18	XTB30	3.0"	18"	479
D42C20	XTB30	3.0"	20"	498
D42C26	XTB30	3.0"	26"	554
D42C32	XTB30	3.0"	32"	610
D42C38	XTB30	3.0"	38"	666
D42C44	XTB30	3.0"	44"	888
D42C51	XTB30	3.0"	51"	935
D42C57	XTB30	3.0"	57"	991
D42C63	XTB30	3.0"	63"	1047
D42C08XT35	XTB35	3.5"	8"	397
D42C10	XTB35	3.5"	10"	416
D42C12	XTB35	3.5"	12"	435
D42C14	XTB35	3.5"	14"	453
D42C16	XTB35	3.5"	16"	472
D42C18	XTB35	3.5"	18"	491
D42C20	XTB35	3.5"	20"	509
D42C26	XTB35	3.5"	26"	565
D42C32	XTB35	3.5"	32"	621
D42C38	XTB35	3.5"	38"	678
D42C44	XTB35	3.5"	44"	899
D42C51	XTB35	3.5"	51"	946
D42C57	XTB35	3.5"	57"	1002
D42C63	XTB35	3.5"	63"	1058

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
42" diameter				
D42C08XT40	XTB40	4.0"	8"	412
D42C10	XTB40	4.0"	10"	430
D42C12	XTB40	4.0"	12"	449
D42C14	XTB40	4.0"	14"	468
D42C16	XTB40	4.0"	16"	486
D42C18	XTB40	4.0"	18"	505
D42C20	XTB40	4.0"	20"	532
D42C26	XTB40	4.0"	26"	580
D42C32	XTB40	4.0"	32"	636
D42C38	XTB40	4.0"	38"	692
D42C44	XTB40	4.0"	44"	914
D42C51	XTB40	4.0"	51"	961
D42C57	XTB40	4.0"	57"	1017
D42C63	XTB40	4.0"	63"	1073
D42C08XT45	XTB45	4.5"	8"	430
D42C10	XTB45	4.5"	10"	448
D42C12	XTB45	4.5"	12"	467
D42C14	XTB45	4.5"	14"	486
D42C16	XTB45	4.5"	16"	504
D42C18	XTB45	4.5"	18"	523
D42C20	XTB45	4.5"	20"	568
D42C26	XTB45	4.5"	26"	598
D42C32	XTB45	4.5"	32"	654
D42C38	XTB45	4.5"	38"	710
D42C44	XTB45	4.5"	44"	932
D42C51	XTB45	4.5"	51"	979
D42C57	XTB45	4.5"	57"	1035
D42C63	XTB45	4.5"	63"	1091
D42C08XT50	XTB50	5.0"	8"	475
D42C10	XTB50	5.0"	10"	493
D42C12	XTB50	5.0"	12"	512
D42C14	XTB50	5.0"	14"	531
D42C16	XTB50	5.0"	16"	549
D42C18	XTB50	5.0"	18"	568
D42C20	XTB50	5.0"	20"	587
D42C26	XTB50	5.0"	26"	643
D42C32	XTB50	5.0"	32"	699
D42C38	XTB50	5.0"	38"	755
D42C44	XTB50	5.0"	44"	977
D42C51	XTB50	5.0"	51"	1024
D42C57	XTB50	5.0"	57"	1080
D42C63	XTB50	5.0"	63"	1136
D42C08XT60	XTB60	6.0"	8"	528
D42C10	XTB60	6.0"	10"	546
D42C12	XTB60	6.0"	12"	565
D42C14	XTB60	6.0"	14"	584
D42C16	XTB60	6.0"	16"	602

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
42" diameter				
D42C18	XTB60	6.0"	18"	621
D42C20	XTB60	6.0"	20"	640
D42C26	XTB60	6.0"	26"	696
D42C32	XTB60	6.0"	32"	752
D42C38	XTB60	6.0"	38"	808
D42C44	XTB60	6.0"	44"	1030
D42C51	XTB60	6.0"	51"	1077
D42C57	XTB60	6.0"	57"	1133
D42C63	XTB60	6.0"	63"	1189
48" diameter				
D48C26XT45	XTB45	4.5"	26"	722
D48C32	XTB45	4.5"	32"	787
D48C38	XTB45	4.5"	38"	851
D48C44	XTB45	4.5"	44"	1128
D48C51	XTB45	4.5"	51"	1182
D48C57	XTB45	4.5"	57"	1246
D48C63	XTB45	4.5"	63"	1310
D48C26XT50	XTB50	5.0"	26"	767
D48C32	XTB50	5.0"	32"	832
D48C38	XTB50	5.0"	38"	896
D48C44	XTB50	5.0"	44"	1173
D48C51	XTB50	5.0"	51"	1227
D48C57	XTB50	5.0"	57"	1291
D48C63	XTB50	5.0"	63"	1355
D48C26XT60	XTB60	6.0"	26"	820
D48C32	XTB60	6.0"	32"	885
D48C38	XTB60	6.0"	38"	949
D48C44	XTB60	6.0"	44"	1226
D48C51	XTB60	6.0"	51"	1280
D48C57	XTB60	6.0"	57"	1344
D48C63	XTB60	6.0"	63"	1408


Although our range and variety of drum pulleys is extensive, we welcome your requirements for custom sizes. Please call us with the details.



Assinck's Wing Type Conveyor Pulleys provide automatic self-cleaning action, discharging foreign material to the side of the conveyor as the pulley rotates. The strong watertight double cone design features individual gussets welded continuously to each wing and hub for longer life. Individual wing construction reduces belt misalignment and belt wear because it cuts down material build-up between belt and pulley. Each wing is also welded to a thick wall tube which extends from hub to hub, supporting the wings and minimizing metal fatigue. Available in sizes 10" through 36" o.d., 12" through 66" face width. Also available with AR-400 bars for extended pulley life.

Construction:

- Full length pipe welds.
- Jig welded for uniform wing spacing and concentricity.
- Crown face.
- Popular styles of tapered compression hubs are in stock.
- Specially designed engineered pulleys are offered.
- Full round face bars for extra pulley life and smooth belt to pulley contact.

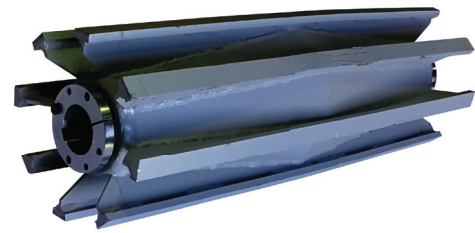

AR400:

Assinck Limited has recognized a demand in the marketplace for reduction in cost per ton, in operating costs. Our clients have reported to us that it's a very common practice to "re-build" OR "Hard Surface" the wing pulley tips/bars. Taking this into careful consideration, we have designed and developed a new stronger, more wear-resistant design. This new design encompasses thicker wings, with AR400 plated tips/bars. This will ensure that your investment in an Assinck heavy duty AR400 wing pulley will not require regular "re-builds", and will outlast the competition, up to four times longer! (depending on applications).

- Thicker wings.
- Full Tubular Design for structural integrity.
- AR400 plated tips/bars for upto four times longer life than conventional design (depending on applications).
- Standard sizes always in stock ready to ship, custom sizes available upon request.
- Emergency orders welcomed.
- All pulleys come standard with hubs and bushings.
- Shafts and bearings can be provided.

Welded Steel Wing Type Pulleys – Heavy Duty Available Sizes

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
10" diameter				
W10C12XT25	XTB25	2.5"	12"	44
W10C14	XTB25	2.5"	14"	49
W10C16	XTB25	2.5"	16"	55
W10C18	XTB25	2.5"	18"	62
W10C20	XTB25	2.5"	20"	68
W10C26	XTB25	2.5"	26"	86
W10C32	XTB25	2.5"	32"	107
W10C38	XTB25	2.5"	38"	125
W10C12XT30	XTB30	3.0"	12"	52
W10C14	XTB30	3.0"	14"	57
W10C16	XTB30	3.0"	16"	62
W10C18	XTB30	3.0"	18"	70
W10C20	XTB30	3.0"	20"	76
W10C26	XTB30	3.0"	26"	94
W10C32	XTB30	3.0"	32"	114
W10C38	XTB30	3.0"	38"	132

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
12" diameter				
W12C12XT25	XTB25	2.5"	12"	55
W12C14	XTB25	2.5"	14"	64
W12C16	XTB25	2.5"	16"	72
W12C18	XTB25	2.5"	18"	82
W12C20	XTB25	2.5"	20"	92
W12C26	XTB25	2.5"	26"	118
W12C32	XTB25	2.5"	32"	144
W12C38	XTB25	2.5"	38"	169
W12C44	XTB25	2.5"	44"	196
W12C12XT30	XTB30	3.0"	12"	58
W12C14	XTB30	3.0"	14"	66
W12C16	XTB30	3.0"	16"	74
W12C18	XTB30	3.0"	18"	84
W12C20	XTB30	3.0"	20"	95
W12C26	XTB30	3.0"	26"	122
W12C32	XTB30	3.0"	32"	152
W12C38	XTB30	3.0"	38"	180
W12C44	XTB30	3.0"	44"	211

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
12" diameter				
W12C12XT35	XTB35	3.5"	12"	66
W12C14	XTB35	3.5"	14"	74
W12C16	XTB35	3.5"	16"	83
W12C18	XTB35	3.5"	18"	92
W12C20	XTB35	3.5"	20"	103
W12C26	XTB35	3.5"	26"	131
W12C32	XTB35	3.5"	32"	161
W12C38	XTB35	3.5"	38"	188
W12C44	XTB35	3.5"	44"	220
14" diameter				
W14C12XT25	XTB25	2.5"	12"	67
W14C14	XTB25	2.5"	14"	78
W14C16	XTB25	2.5"	16"	89
W14C18	XTB25	2.5"	18"	101
W14C20	XTB25	2.5"	20"	113
W14C26	XTB25	2.5"	26"	147
W14C32	XTB25	2.5"	32"	182
W14C38	XTB25	2.5"	38"	216
W14C44	XTB25	2.5"	44"	250
W14C51	XTB25	2.5"	51"	288
W14C12XT30	XTB30	3.0"	12"	70
W14C14	XTB30	3.0"	14"	80
W14C16	XTB30	3.0"	16"	91
W14C18	XTB30	3.0"	18"	103
W14C20	XTB30	3.0"	20"	115
W14C26	XTB30	3.0"	26"	149
W14C32	XTB30	3.0"	32"	185
W14C38	XTB30	3.0"	38"	220
W14C44	XTB30	3.0"	44"	254
W14C51	XTB30	3.0"	51"	294
W14C12XT35	XTB35	3.5"	12"	92
W14C14	XTB35	3.5"	14"	103
W14C16	XTB35	3.5"	16"	114
W14C18	XTB35	3.5"	18"	126
W14C20	XTB35	3.5"	20"	138
W14C26	XTB35	3.5"	26"	172
W14C32	XTB35	3.5"	32"	208
W14C38	XTB35	3.5"	38"	245
W14C44	XTB35	3.5"	44"	286
W14C51	XTB35	3.5"	51"	325
16" diameter				
W16C12XT25	XTB25	2.5"	12"	77
W16C14	XTB25	2.5"	14"	88
W16C16	XTB25	2.5"	16"	98
W16C18	XTB25	2.5"	18"	110
W16C20	XTB25	2.5"	20"	122
W16C26	XTB25	2.5"	26"	156
W16C32	XTB25	2.5"	32"	192
W16C38	XTB25	2.5"	38"	226
W16C44	XTB25	2.5"	44"	259
W16C51	XTB25	2.5"	51"	298

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
16" diameter				
W16C12XT30	XTB30	3.0"	12"	80
W16C14	XTB30	3.0"	14"	91
W16C16	XTB30	3.0"	16"	102
W16C18	XTB30	3.0"	18"	114
W16C20	XTB30	3.0"	20"	126
W16C26	XTB30	3.0"	26"	160
W16C32	XTB30	3.0"	32"	196
W16C38	XTB30	3.0"	38"	232
W16C44	XTB30	3.0"	44"	265
W16C51	XTB30	3.0"	51"	304
W16C12XT35	XTB35	3.5"	12"	88
W16C14	XTB35	3.5"	14"	98
W16C16	XTB35	3.5"	16"	109
W16C18	XTB35	3.5"	18"	121
W16C20	XTB35	3.5"	20"	133
W16C26	XTB35	3.5"	26"	167
W16C32	XTB35	3.5"	32"	203
W16C38	XTB35	3.5"	38"	240
W16C44	XTB35	3.5"	44"	276
W16C51	XTB35	3.5"	51"	316
W16C12XT40	XTB40	4.0"	12"	99
W16C14	XTB40	4.0"	14"	110
W16C16	XTB40	4.0"	16"	121
W16C18	XTB40	4.0"	18"	133
W16C20	XTB40	4.0"	20"	145
W16C26	XTB40	4.0"	26"	179
W16C32	XTB40	4.0"	32"	215
W16C38	XTB40	4.0"	38"	252
W16C44	XTB40	4.0"	44"	288
W16C51	XTB40	4.0"	51"	328
18" diameter				
W18C12XT25	XTB25	2.5"	12"	90
W18C14	XTB25	2.5"	14"	106
W18C16	XTB25	2.5"	16"	121
W18C18	XTB25	2.5"	18"	136
W18C20	XTB25	2.5"	20"	151
W18C26	XTB25	2.5"	26"	198
W18C32	XTB25	2.5"	32"	247
W18C38	XTB25	2.5"	38"	296
W18C44	XTB25	2.5"	44"	344
W18C51	XTB25	2.5"	51"	402
W18C12XT30	XTB30	3.0"	12"	92
W18C14	XTB30	3.0"	14"	108
W18C16	XTB30	3.0"	16"	124
W18C18	XTB30	3.0"	18"	138
W18C20	XTB30	3.0"	20"	154

To order parts call 1.888.801.4700

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
18" diameter				
W18C26	XTB30	3.0"	26"	200
W18C32	XTB30	3.0"	32"	250
W18C38	XTB30	3.0"	38"	299
W18C44	XTB30	3.0"	44"	347
W18C51	XTB30	3.0"	51"	404
W18C12XT35	XTB35	3.5"	12"	110
W18C14	XTB35	3.5"	14"	114
W18C16	XTB35	3.5"	16"	130
W10C18	XTB35	3.5"	18"	144
W18C20	XTB35	3.5"	20"	160
W18C26	XTB35	3.5"	26"	206
W18C32	XTB35	3.5"	32"	256
W18C38	XTB35	3.5"	38"	305
W18C44	XTB35	3.5"	44"	353
W18C51	XTB35	3.5"	51"	410
W18C12XT40	XTB40	4.0"	12"	108
W18C14	XTB40	4.0"	14"	124
W18C16	XTB40	4.0"	16"	139
W18C18	XTB40	4.0"	18"	154
W18C20	XTB40	4.0"	20"	169
W18C26	XTB40	4.0"	26"	216
W18C32	XTB40	4.0"	32"	265
W18C38	XTB40	4.0"	38"	314
W18C44	XTB40	4.0"	44"	362
W18C51	XTB40	4.0"	51"	420
W18C12XT45	XTB45	4.5"	12"	118
W18C14	XTB45	4.5"	14"	134
W18C16	XTB45	4.5"	16"	150
W18C18	XTB45	4.5"	18"	164
W18C20	XTB45	4.5"	20"	180
W18C26	XTB45	4.5"	26"	227
W18C32	XTB45	4.5"	32"	276
W18C38	XTB45	4.5"	38"	325
W18C44	XTB45	4.5"	44"	373
W18C51	XTB45	4.5"	51"	431
20" diameter				
W20C12XT25	XTB25	2.5"	12"	115
W20C14	XTB25	2.5"	14"	136
W20C16	XTB25	2.5"	16"	152
W20C18	XTB25	2.5"	18"	169
W20C20	XTB25	2.5"	20"	188
W20C26	XTB25	2.5"	26"	240
W20C32	XTB25	2.5"	32"	295
W20C38	XTB25	2.5"	38"	350
W20C44	XTB25	2.5"	44"	404
W20C51	XTB25	2.5"	51"	466
W20C57	XTB25	2.5"	57"	520
W20C63	XTB25	2.5"	63"	571

Item No.	Bushing	Max. Bore	Face Width	Weight (lbs)
20" diameter				
W20C12XT30	XTB30	3.0"	12"	118
W20C14	XTB30	3.0"	14"	138
W20C16	XTB30	3.0"	16"	155
W20C18	XTB30	3.0"	18"	172
W20C20	XTB30	3.0"	20"	191
W20C26	XTB30	3.0"	26"	242
W20C32	XTB30	3.0"	32"	298
W20C38	XTB30	3.0"	38"	353
W20C44	XTB30	3.0"	44"	407
W20C51	XTB30	3.0"	51"	468
W20C57	XTB30	3.0"	57"	522
W20C63	XTB30	3.0"	63"	574
W20C12XT35	XTB35	3.5"	12"	122
W20C14	XTB35	3.5"	14"	143
W20C16	XTB35	3.5"	16"	160
W20C18	XTB35	3.5"	18"	176
W20C20	XTB35	3.5"	20"	196
W20C26	XTB35	3.5"	26"	247
W20C32	XTB35	3.5"	32"	302
W20C38	XTB35	3.5"	38"	358
W20C44	XTB35	3.5"	44"	412
W20C51	XTB35	3.5"	51"	473
W20C57	XTB35	3.5"	57"	527
W20C63	XTB35	3.5"	63"	578
W20C12XT40	XTB40	4.0"	12"	130
W20C14	XTB40	4.0"	14"	150
W20C16	XTB40	4.0"	16"	167
W20C18	XTB40	4.0"	18"	184
W20C20	XTB40	4.0"	20"	203
W20C26	XTB40	4.0"	26"	254
W20C32	XTB40	4.0"	32"	311
W20C38	XTB40	4.0"	38"	365
W20C44	XTB40	4.0"	44"	419
W20C51	XTB40	4.0"	51"	480
W20C57	XTB40	4.0"	57"	534
W20C63	XTB40	4.0"	63"	586
W20C12XT45	XTB45	4.5"	12"	137
W20C14	XTB45	4.5"	14"	157
W20C16	XTB45	4.5"	16"	174
W20C18	XTB45	4.5"	18"	191
W20C20	XTB45	4.5"	20"	210
W20C26	XTB45	4.5"	26"	262
W20C32	XTB45	4.5"	32"	317
W20C38	XTB45	4.5"	38"	372
W20C44	XTB45	4.5"	44"	426
W20C51	XTB45	4.5"	51"	487
W20C57	XTB45	4.5"	57"	541
W20C63	XTB45	4.5"	63"	593